LOW-CARBON
诺可®智造

Grille Downlight

Grille Downlight/Tiltable

The LED Grille Series is tailored for hotels, boutiques, jewelry stores and similar spaces, with core strengths of 145lm/w efficacy and Ra>90 for true color display.

It offers retractable body into ceilings, 350° horizontal rotation and 90° vertical adjustment, making it an ideal choice for flexible, high-quality illumination.

Drawing

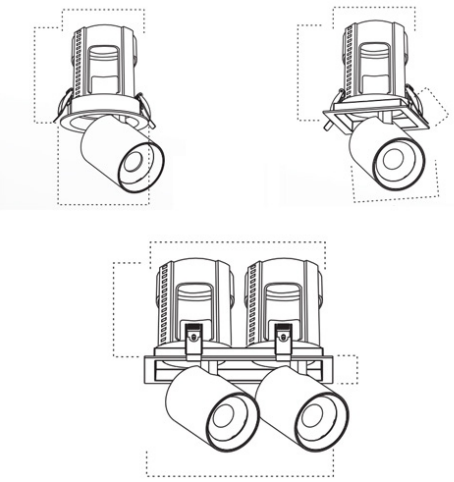

Single-head Grille Downlight/Round

Model No.	Power	Size (mm)	Cutout(mm)	CRI	Lumen	Angle
LC-GL6499-R10W	10W	Ø90×H95	Ø75	⩾90	1400lm	24° / 60°
LC-GL6499-R15W	15W	Ø110×H120	Ø95	⩾90	2100lm	24° / 60°
LC-GL6499-R25W	25W	Ø130×H140	Ø115	⩾90	3600lm	24° / 60°

Single-head Grille Downlight/Square

Model No.	Power	Size (mm)	Cutout	CRI	Lumen	Angle
LC-GL6499-S10W	10W	90*90×H95	75*75	⩾90	1400lm	24° / 60°
LC-GL6499-S15W	15W	110*110×H120	95*95	⩾90	2100lm	24° / 60°
LC-GL6499-S25W	25W	130*130×H140	115*115	⩾90	3600lm	24° / 60°

Double-head Grille Downlight

Model No.	Power	Size (mm)	Cutout	CRI	Lumen	Angle
LC-GL6499-2*10W	20W	90*170×H95	75*155	⩾90	2800lm	24° / 60°
LC-GL6499-2*15W	30W	110*210×H120	95*190	⩾90	4200lm	24° / 60°
LC-GL6499-2*25W	50W	130*250×H140	115*230	⩾90	7200lm	24° / 60°

Light distribution curve

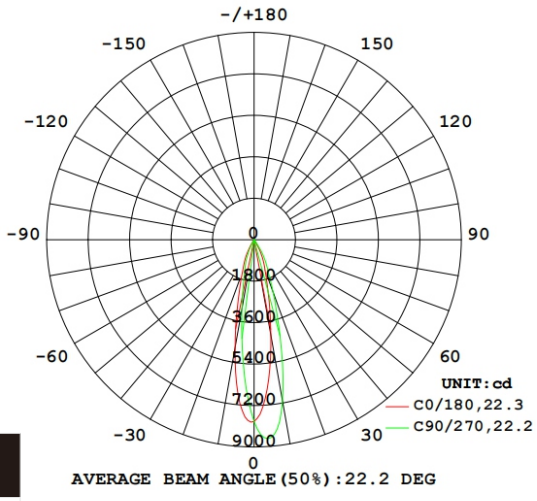

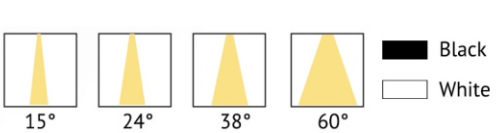

Tel: +86 189 2923 1353 www.lowcarbonled.com E-mail: info@lowcarbonled.com
Address: Block B, Floor 2nd, Building A, No. 16, Lefeng 8th Road, Maohui Industrial Zone, Henglan Town, Zhongshan City(528478), GD