LOW-CARBON
诺可®智造

Surface Mounted

Drawing

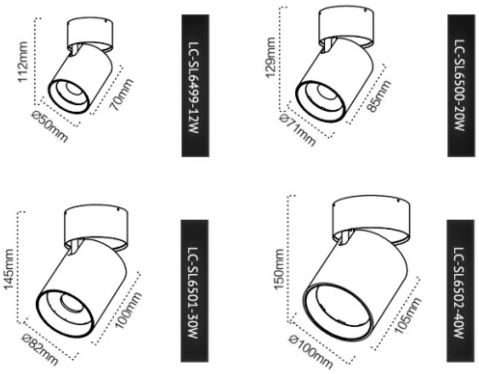

Surface Mounted Downlight/Tiltable

The Surface Mounted Downlight Series is designed for commercial lighting, hotels, clothing and boutique stores, boasting core strengths of high luminous efficacy up to 145lm/w and color rendering index over Ra90.

It provides flexible wattage selections from 10W to 32W. Offering excellent light quality and vivid color reproduction, it's a perfect option for spaces requiring bright, true-to-life illumination.90deg tilting angle.

Model No.	Power	Size (mm)	PF	CRI	Lumen	Angle
LC-SL6499-10W	10W	Ø50×H70	>0.9	⩾90	1400lm	24° / 60°
LC-SL6500-15W	15W	Ø71×H85	>0.9	⩾90	2100lm	24° / 60°
LC-SL6501-25W	25W	Ø82×H100	>0.9	⩾90	3600lm	24° / 60°
LC-SL6502-32W	32W	Ø100×H105	>0.9	⩾90	4400lm	24° / 60°

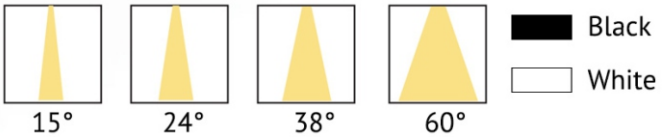

Light distribution curve

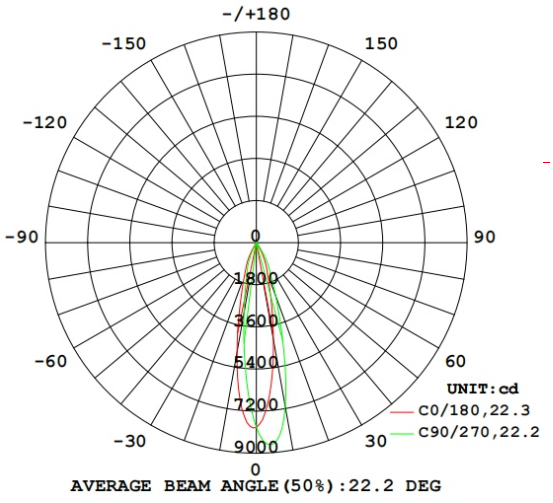

Tel: +86 189 2923 1353 www.lowcarbonled.com E-mail: info@lowcarbonled.com
Address: Block B, Floor 2nd, Building A, No. 16, Lefeng 8th Road, Maohui Industrial Zone, Henglan Town, Zhongshan City(528478), GD